


# A CASE HARDENED AND GROUND

**INCH: 1/4" to 1"**  
**METRIC: 8 - 25 mm**

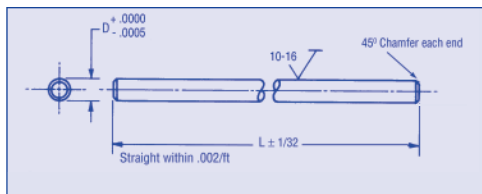

\* For 1/2" Diameter and Up. For Straightness of Diameters less than 1/2 inch, consult with the factory.

**Material:** AISI C - 1060 Case Hardness: 60-65C

**Ordering Information:**


Please include desired length in inches after catalog number, tolerance to be  $\pm 1/32$ ".

Please refer to index for mounting accessories.

Dia. Inch	Catalog Number	Min. Depth of Hardness	Weight Per Inch (lb.)	Length
.2490	AAC-F1-24	.040"	.014	UP TO 6 FEET
.2495	AAC-F1-25			
.3740	AAC-F1-37	.040"	.031	
.3745	AAC-F1-38			
.4990	AAC-F1-48	.060"	.055	
.4995	AAC-F1-49			
.5000	AAC-F1-50			
.6240	AAC-F1-61	.060"	.086	
.6245	AAC-F1-62			
.6250	AAC-F1-63			
.7490	AAC-F1-73	.060"	.125	
.7495	AAC-F1-74			
.7500	AAC-F1-75			
.8745	AAC-F1-87	.060"	.170	
.8750	AAC-F1-88			
.9990	AAC-F1-98	.080"	.222	
.9995	AAC-F1-99			
1.0000	AAC-F1-100			
1.0003	AAC-F1-101			

Metric	Inch	Catalog Number	Min. Depth of Hardness	Weight Per Inch (lb.)	Length
8 mm	.3150"	AAC-D1-8	.040	.022	Up to 6 Feet
12	.4724	AAC-D1-12	.060	.050	
16	.6299	AAC-D1-16	.060	.088	
20	.7874	AAC-D1-20	.060	.138	
25	.9843	AAC-D1-25	.080	.216	

**METRIC SIZES**  
**3 - 6 mm**

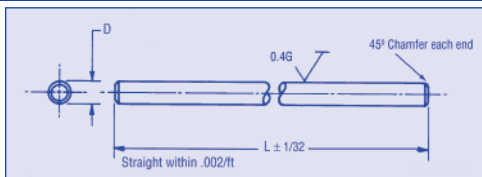

**Material:** high-carbon chromium bearing steel (SUJ2)

Hardness: 60HRC or more

Other sizes available, please consult factory.

**ORDER BY CATALOG NUMBER**

Catalog Number	Tolerance g6 $\mu\text{m}$	Catalog Number	Tolerance g5 $\mu\text{m}$ Special Order	Diameter D mm	Length L mm	Mass kg/m
AAC-D2-1	-2 / -8	AAC-D1-1	-2 / -6	3	up to 400	0.06
AAC-D2-2	-4 / -12	AAC-D1-2	-4 / -9	4	up to 500	0.10
AAC-D2-3	-4 / -12	AAC-D1-3	-4 / -9	5	up to 700	0.16
AAC-D2-4	-4 / -12	AAC-D1-4	-4 / -9	6	up to 1000	0.23